

10-2-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
UTILITY PATENT APPLICATION TRANSMITTAL

ASSISTANT COMMISSIONER OF PATENTS  
Box Patent Application  
Washington, D.C. 20231

Attorney Docket No. 24530.00600  
Prior Application Number:  
Art Unit:  
Examiner:  
PTO Customer Number:

Sir:

Transmitted herewith for filing is a utility patent application of

Stephane Maes,  
Tim Twerdahl,  
Benoit Vialle,  
Ryan Robertson,

jc922 U.S. PTO  
09/675406  
09/29/00

for: SYSTEM AND METHOD FOR INITIATING A CALL USING A PHONE HARD-BUTTON AND  
A SCREEN DIALER OF A PERSONAL DIGITAL ASSISTANT

Enclosed are the following:

- 1. ☒ Specification, abstract and claims of 40 pages.
- 2. ☒ 10 sheets of ☐ formal ☒ informal drawings ☐ No drawings.
- 3. ☒ Declaration (original or copy) by the named inventor(s) - unsigned
- 4. ☐ Preliminary Amendment
- 5. ☐ Information Disclosure Statement
- 6. ☐ Other:

**NOTE the following:**

- 7. ☐ Applicant is a small entity. Unsigned Small Entity Statement enclosed – 50% Filing Fee Reduction (if applicable)
- 8. ☐ The prior application is assigned to
- 9. This application is a:  
☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of Prior Application

Filed:

- 10. ☐ Priority of the following application(s) is (are) claimed under 35 U.S.C. 119:

Serial No.	Date Filed	Country	Certified Copy of Priority Doc. Filed	
			USSN or PCT#	Date

- 11. ☐ An Extension of Time is filed concurrently herewith for the parent application.
- 12. ☐ Cancel claims \_\_\_\_\_ prior to calculation of the filing fee.

**FILING FEE:**calculated below (after accounting for any preliminary amendment or claims cancellations if

jc915 U.S. PTO  
09/29/00

09675406 092900

noted above):


<input checked="" type="checkbox"/>	Total Claims	25	Total Claims Subject to Fees: 5	\$90.00
<input checked="" type="checkbox"/>	Independent Claims	3	Total Claims Subject to Fees: 0	\$
<input type="checkbox"/>	Multiple Dependent Claims			\$
<input checked="" type="checkbox"/>	Basic Filing Fee			\$690.00
<input type="checkbox"/>	Extension Fees			\$
	Sub-Total			\$780.00
<input type="checkbox"/>	Less Small Entity Fee Reduction			\$
<input type="checkbox"/>	Assignment Recordal Fees			\$
	Total Fees			\$780.00

- ☒ Check(s) no. 472299 in the amount of \$780.00 is enclosed (must at least cover the basic fee). If no check or an insufficient check is enclosed and a fee is due herewith, the Commissioner is authorized to charge any fee or additional fee due in connection herewith to Deposit Account No. 03-3821, **referencing Attorney Docket No. 24530.00600. A duplicate of this sheet is enclosed.**
- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or 1.17 to Deposit Account No. 03-3821, **referencing Attorney Docket No. 24530.00600. A duplicate copy of this sheet is enclosed.**

Respectfully submitted,

Date: September 29, 2000

Crosby, Heafey, Roach & May  
P.O. Box 7936  
San Francisco, CA 94120-7936

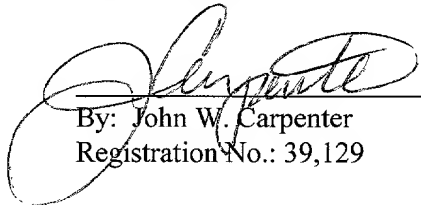  
By: John W. Carpenter  
Registration No.: 39,129


Certificate of Mailing by "Express Mail"

Express Mail Mailing Label Number: EL588334424US

Date of Deposit: September 29, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service By "Express Mail Post Office Addressee" Service under 37 CFR 1.19 on the date indicated Above and is addressed to the Assistant Commissioner for Patents, Washington, DC 20231

Rebecca M. Klits  
Name of Mailing Individual

  
Signature of Mailing Individual

SYSTEM AND METHOD FOR INITIATING A CALL USING A PHONE HARD-  
BUTTON AND A SCREEN DIALER OF A PERSONAL DIGITAL ASSISTANT

Palm, Inc. reference no. 3506

5

Inventors:

Stephane Maes

Tim Twerdahl

Benoit Vialle

10

Ryan Robertson

COPYRIGHT NOTICE

15

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

20

25

BACKGROUND OF THE INVENTION

Field of the Invention

30

The present invention generally relates to telecommunications and, more particularly, to providing phone applications in a portable computer system.

Discussion of Background

Personal computer systems have become common tools in modern society. To organize their lives, many personal

00600:12227256.1 .

computer users use personal information management applications such as an address book and a daily organizer on their personal computers. Although such applications have proven useful for personal information management, 5 their utility is limited by the fact that the person must be sitting at their personal computer system to access the information.

To remedy this limitation, many palmtop computers, electronic organizers and other handheld devices, commonly 10 known as personal digital assistants ("PDA's") have been introduced. A PDA is a computer that is small enough to be held in the hand of a user and runs personal information management applications such as an address book, a daily organizer, and electronic notepads. These applications make 15 people's lives easier.

The most popular brand of PDA is the Palm™ 10. However, the Palm™ 10 is much more than a simple PDA. A basic configuration of the Palm™ 10 is shown in FIG. 1. This small, slim, device, about the size of your wallet, can 20 hold 6000 addresses, 5 years of appointments, 1500 to-do items, 1500 memos, 200 e-mail messages, and can run many different software applications.

The front panel of the Palm™ 10 is a large LCD screen 11, which is touch-sensitive and allows a user to enter and 25 manipulate data. By using a stylus (not shown) to interact with a touch-sensitive screen, a user may easily navigate through a host of various software applications. A stylus

is used to interact with information on a screen in much the same way as a mouse on a desktop personal computer.

Many PDA's offer Internet connectivity, as well as a vast array of hardware and software choices. PDA's have evolved into a new kind of handheld device that people use to instantly manage all kinds of information, from email, to medical data, to stock reports. Unfortunately, to date, PDA's have had only modest success in the marketplace, due to their high price tags, as well as their useful although limited applications.

In addition to being somewhat limited, many PDA applications have generally not been available in the PDA's counterpart—the mobile phone. Mobile phone manufacturers have taken the approach of trying to integrate PDA functionality into their mobile phones. This approach has several disadvantages. To fulfill their primary function of efficiently making phone calls, mobile phones are geared toward a different feature set from PDA's. For example, as one of the design aims for mobile phones is ever-smaller size, Internet access is compromised. Mobile phones are an unattractive Internet access option because the screen on a mobile phone is typically much smaller than that of a PDA. A mobile phone can typically display only a small fraction of the amount information that a PDA can display.

Generally, many applications that are user-friendly on a PDA would be cumbersome in a mobile phone environment. Additional examples of such applications include inputting



## SUMMARY OF THE INVENTION

It has been recognized that what is needed is an efficient system for integrating mobile phone functionality into a palmtop environment. Broadly speaking, the present invention fills these needs by providing a system and method of managing phone calls initiated from a phone device of a personal digital assistant. It should be appreciated that the present invention can be implemented in numerous ways, including as a process, an apparatus, a system, a device or a method. Several inventive embodiments of the present invention are described below.

In one embodiment, the method comprises receiving a call signal to initiate a call device. A call device is initiated in response to the call signal. Also, a selectable interface is displayed in response to the call signal. A dial signal is received from the selectable interface to initiate a phone call. The phone call is then initiated in response to the dial signal.

In another embodiment, the method further includes receiving a phone number for the phone call. Also, a save signal is received to save the phone number. An address entry application is then initiated in response to receiving the save signal.

In still another embodiment, a system is disclosed for managing a phone call. The system comprises, among other

things, a personal digital assistant, including the following: a display device; a phone device; a call device configured to control the phone device and to display a selectable interface on the display device; a hard button  
5 configured to initiate the call device; and a selection mechanism configured to receive user selections from the selectable interface.

Advantageously, the present invention provides a more convenient and efficient system for combining phone  
10 functionality with PDA functionality. Among other things, a user may utilize traditional mobile phone applications without having to deal with mobile phone inconveniences. A computer environment is described for software applications that require more robust computer systems and graphics  
15 capabilities than a typical mobile phone can provide. The computer environment that is described not only fulfills these requirements, but also has palm-size portability. Other embodiments, disclosed in detail below, illustrate how the present invention provides phone applications that are  
20 ideally used within a PDA of the present invention.

The invention encompasses other embodiments of a method, an apparatus, and a computer-readable medium, which are configured as set forth above and with other features and alternatives.



## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be readily understood by the following detailed description in conjunction with the accompanying drawings. To facilitate this description, like  
5 reference numerals designate like structural elements.

FIG. 1 shows a personal digital assistant (PDA).

FIG. 2 shows a personal digital assistant (PDA), in accordance with one embodiment of the present invention.

FIG. 3 shows a call device of the phone device of the  
10 PDA after a user has started to input digits of a phone number, in accordance with one embodiment of the present invention.

FIG. 4 shows a call device after a user pushes the talk  
15 button to initiate a phone call, in accordance with one embodiment of the present invention.

FIG. 5 shows a call device after a connection has been made, in accordance with one embodiment of the present invention.

FIG. 6 shows a screen of an address entry application,  
20 appearing after the save button of the call device is pressed, in accordance with one embodiment of the present invention.

FIG. 7 shows a call device after a name is inputted in the address entry application , in accordance with one embodiment of the present invention.

FIG. 8 shows a call device after the mute button is pressed, in accordance with one embodiment of the present invention.

FIG. 9 shows a call device after a phone call to the voicemail application has been initiated, in accordance with one embodiment of the present invention.

FIG. 10 is a flow chart of a method of managing phone calls initiated from a phone device of a PDA, in accordance with one embodiment of the present invention.

FIG. 11 is a more detailed flowchart of the method of FIG. 10, in accordance with one embodiment of the present invention.

FIG. 12 is a flowchart of a method of managing a phone call initiated from a phone device of a PDA, in accordance with one embodiment of the present invention.

FIG. 13 is a block diagram that illustrates a computer system upon which an embodiment of the invention may be implemented.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

An invention for a system and method of managing phone calls initiated from a phone device of a personal digital assistant is disclosed. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be understood, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process operations have not been described in detail in order not to unnecessarily obscure the present invention.

### General Overview

FIG. 2 shows a personal digital assistant (PDA) 100, in accordance with one embodiment of the present invention. Examples of a PDA include palm style computers, such as a Palm III<sup>TM</sup>, Palm V<sup>TM</sup>, or Palm VII<sup>TM</sup>, organizers, manufactured by 3Com Corporation. Other embodiments of the invention include Windows CE<sup>TM</sup> handheld computers, other handheld computers, and other personal digital assistants.

The Palm<sup>TM</sup> and its operating environment are used herein to illustrate various aspects of the present invention. However, it should be understood that the present invention may be practiced on other devices, including other Palm<sup>TM</sup> models, PDA's, computer devices, PC's, notebooks, etc.

005360-904290

The PDA 100 shown in FIG. 2 is preferably a combination of a processor and memory, having a portable energy source, and being incased in PDA housing 130. In one example, the PDA housing 130 is made of a lightweight, durable plastic material, and is ergonomically designed to be held in the palm of one hand. A PDA 100 combines computing, telephone/fax, and networking features, and can function as a cellular phone, fax sender, and personal organizer. A PDA 100 is preferably pen-based, using a stylus rather than a keyboard for input. This use of a stylus means that a PDA 100 preferably incorporates handwriting recognition features. In another embodiment, a PDA 100 can react to voice input by using voice recognition technologies.

The PDA 100 shown in FIG. 2 includes a plurality of hard buttons 128 and a display device 132 fixed in the PDA housing 130. The display device 132 may be provided with a graphical user interface that allows a user to select and alter displayed content using a stylus. A plurality of soft buttons 126 for performing automated or pre-programmed functions may be provided on a portion of the display device.

In one embodiment, a soft button 126 is a tap recognizer. A tap recognizer is hardware, software, or combination thereof that includes a touch-sensitive portion of the display device 132. A tap recognizer is configured to initiate a predetermined routine when a user taps the

soft button 126. In an alternative embodiment, the display device 132 also includes a Graffiti™ writing section 134 for tracing alphanumeric characters as input.

## 5 Structural Overview

As shown in FIG. 2, a call device 101 is active on the display device 101. A phone device in the PDA 100 runs the call device 101. The phone device is preferably implemented from software, hardware, or combination thereof that allows  
10 a user to perform functions of a mobile phone. Such mobile phone functions may include, for example, dialing phone numbers, placing phone calls, receiving phone calls, and receiving voicemail. When the PDA 100 is performing functions of a mobile phone, a mobile phone indicator 122,  
15 preferably located near the top portion of the screen of the PDA 100, is activated.

When the call device 101 is displayed on the screen of PDA 100, the PDA 100 preferably indicates by a phone status icon 124 that the call device 101 is in dialer mode. The  
20 call device 101 preferably includes a dialer pad 102, which allows a user to input numbers, letters, punctuation, or other symbols into the call device 101. Digits may be inputted, for example, to dial a phone number or to load a phone number into a memory of the PDA 100. Letters may be  
25 inputted, for example, to load a person's name, address, or other information into memory of the PDA 100.



006250" 9042960

If a message has been recorded in the voicemail application, a voicemail indicator 112 preferably appears near the top portion of the screen of the PDA 100. In FIG. 2, the voicemail indicator 112 is an envelope icon. The presence of the voicemail indicator 112 is preferably controlled by a short message service (SMS), a voicemail application, or a combination of both. SMS is a telecommunications tool that supports the transmission of short text messages in a telecommunications network. A voicemail application is a telecommunications tool used to record voice messages of an incoming caller when the phone call is not received or answered by the PDA 100.

The voicemail indicator 112 preferably disappears if there are no unheard messages. Whether the envelope remains on the screen after a message is partly heard (or not deleted in the voicemail application) is dependent on the particular settings of the network in which the voicemail application or SMS operates.

Additionally, the PDA 100 preferably has at the top of the screen a signal strength indicator 106 and a battery charge indicator 108. The signal strength indicator 106 indicates a relative quality and strength of a signal that may be transmitted in a mobile phone network in which the phone device is located. The battery charge indicator 108 shows a relative amount of energy remaining in the battery of the PDA 100.

In a preferred embodiment, one of the hard buttons 128 is configured to initiate the call device 101 when the hard button 128 is activated. A user may activate a hard button 128 by pressing the hard button 128 when the PDA 100 is  
5 powered on and ready for input. In another embodiment, one of the soft buttons 128 is configured to initiate the call device 101 when the soft button 126 is activated. A user may activate a soft button 126 by using a stylus to press a portion of the display device 132 that is configured to  
10 recognize a tap on the soft button 126.

The hard button 128 used to initiate the call device 101 may also be configured to initiate a suspension of a current application. A "current application" is an application, other than the call device 101, that may be  
15 running when the hard button 128 is activated. When a current application is suspended, the current application remains active in the background by maintaining a memory allocation in a random access memory (RAM) of the PDA 100. In an alternative embodiment, the hard button 128 is  
20 configured to initiate an ending or a cancellation, rather than a suspension, of the current application.

An example of a default screen of the call device 101 is shown in FIG. 2. The talk button 114 preferably operates as a redial key if a user presses the talk button 114 before  
25 inputting a phone number on the dialer pad 102 of the call device 101. Once the user starts inputting digits (by



tapping on the screen or in the Graffiti™ area) the digits appear in the name field 104.

FIG. 3 shows the display screen on a call device 101 of the phone device of the PDA 100 after a user has started to input digits of a phone number, in accordance with one embodiment of the present invention. The call device 101 is preferably configured to automatically and appropriately separate the digits by spaces and parenthesis, as needed. When the user has finished composing the correspondent's number, the user may press the talk button 114 on the display device 132 to initiate the phone call.

FIG. 4 shows the display screen on a call device 101 after a user pushes the talk button 114 to initiate a phone call, in accordance with one embodiment of the present invention. When the talk button 114 is pressed, the phone device preferably searches in an address list application for the phone number that was inputted. The address list application is located in a memory of the PDA 100. If the number is in the address list and is associated with a name, the name preferably appears in the name field 104 of the call device 101. Additionally, a letter indicating the type of phone number preferably appears with the phone number. An example of a name and letter that can appear in the name field 104 is "John Smith-w," indicating a phone call is being initiated to John Smith at work. Other letters may be

"h" for home, or "m" for mobile phone. However, the present invention is not so limited to these specific embodiments.

If the number does not exist in the address list application, then the preferred screen that appears after pushing the talk button 114 is shown in FIG. 4. The inputted number appears in the name field 104.

Upon initiating the phone call, a connecting icon 302 preferably appears in the top portion of the call device 101. The connecting icon 302 of FIG. 4 is an animated icon that includes a progression of dots appearing sequentially in time one after another. The purpose of the connecting icon 302 is to indicate a phone call is being dialed. Dialing a phone call involves transmitting a signal into a mobile phone network, wherein the transmitted signal includes information needed to contact a device associated with the dialed phone number.

In one embodiment, the call device 101 can display other feature buttons, such as a save button 303, a note button 304, and a mute button 306.

FIG. 5 shows a call device 101 after a connection has been made, in accordance with one embodiment of the present invention. A connection of the phone call is made when the phone call causes the dialed phone to start ringing on the other end. Additionally, a timer 402 starts, as shown in FIG. 5. The preferred display format of the timer 402 is "minutes : seconds," then "hours : minutes." The timer 402

shows "08:34" (or 8 minutes and 34 seconds) to indicate the duration of the current connection.

FIG. 6 shows a screen of an address entry application 502, appearing after the save button 303 of the call device 101 is pressed, in accordance with one embodiment of the present invention. When the save button 303 is activated, the address entry application 502 preferably displays the active screen of the display device 101. Other applications, such as the call device 101, can run in the background while the address entry application 502 is active.

The address entry application 502 preferably includes a status bar 510. The status bar 510 of FIG. 6 indicates that the address entry application 502 is in "Address Edit" mode, and that the current address entry is "Unfiled." The address entry application 502 preferably includes identification fields 512. The identification fields 512 of FIG. 6 include fields for inputting a "last name," a "first name," a "title," a "company," a "work" phone, a "home" phone, a "fax," an "other" phone number, an "email" address, and a "home" address.

As shown in FIG. 6, the phone number dialed in the call device 101 automatically appears in the work phone field 514. Here, the dialed phone number pre-populates the work phone field 514, which is set as the default. Other fields, such as the home phone field or the fax number field, may

alternatively be set as the default for pre-population. Additionally, a user may activate a details button 506, which is preferably configured to display more information, such as more identification fields 512. A user may also  
5 activate a note button 506, which is preferably configured to activate a note taking application in which the user can input notes about the current address entry. Preferably, by tapping on a done button 504, a user may go back to the application that was active before the address entry  
10 application 502.

FIG. 7 shows a call device 101 after a name is inputted in the address entry application 502, in accordance with one embodiment of the present invention. The name field 104 in FIG. 7 displays the name inputted for the correspondent on  
15 the other end. On the other hand, as shown in FIG. 5, merely the dialed phone number is displayed before the PDA 100 has a name stored in memory. In FIG. 7, the name is shown to be "Timothy Tw...--w." Here, the last name is truncated by ellipses. Also, the letter "w" after the name  
20 indicates that the name "Timothy Tw" is associated with a work phone number for Timothy.

The mute button 306 may be pressed to deactivate a microphone that is preferably electrically connected to the phone device of the PDA 100. Deactivating the microphone  
25 blocks out transmission to the recipient, so that

conversations may take place at the sender's end without being heard by the recipient.

In a preferred embodiment, the microphone is part of an earplug device that is plugged into the PDA 100. When the earplug device is plugged-in, the earplug device is electrically connected to the PDA 100 and is configured to emit sound waves related to signals received from the phone device of the PDA 100. The earplug device allows the user to hear the phone call. In an alternative embodiment, entirely unplugging the earplug device is substantially the same as tapping the mute button 306. The PDA 100 preferably emits an alert (e.g., two short beeps or a flashing light signal) to let the user know that the earplug is unplugged. If the earplug is unplugged, the preferred way to resume talking is to plug back in the earplug device. When the earplug device is unplugged, the speak button 702 is preferably dormant and cannot be activated.

FIG. 8 shows a display on a call device 101 after the mute button 306 is pressed, in accordance with one embodiment of the present invention. Preferably, when the mute button 306 is pressed, the microphone is deactivated, and a speak button 702 replaces the mute button 306. By pressing the speak button 702, a user may reactivate the microphone.

The end button 120 may be pressed to end the phone call. Alternatively, the phone call may be ended if the

correspondent on the other end hangs up. Preferably, if the correspondent hangs up or if the PDA user taps the end button 120, the call is ended and the screen remains as is for about 10 seconds. During such a lapse time, the call device 101 preferably displays either the dialed number or the name (if there is a name by the end of the phone call). The timer stops and flashes to point out that the phone call is over. While the number remains on the screen, the user may still tap the save button 303 to store the phone number using the address entry application 502. To cut short the 10 seconds of lapse time, the user may tap on the end button 120 again or tap another button to initiate another application. After about 10 seconds of lapse time or after the lapse time is cut short, the call device 101 preferably returns to the original default screen, as shown in FIG. 2.

FIG. 9 shows display on a call device 101 after a phone call to the voicemail application has been initiated, in accordance with one embodiment of the present invention. When the voicemail application contains some unread messages, the voicemail indicator 112 preferably appears near the top of the display device 132. A user may tap on the voicemail indicator 112 to initiate a phone call to the voicemail application. To indicate that the voicemail application is being called, the display device 132 preferably displays "Voicemail" in the name field 104 of the call device 101. As discussed above with reference to FIG.

4, the connecting icon 302 appears in order to indicate that the phone device is in the process of establishing a connection.

## 5 Process Overview

FIG. 10 is a flow chart of a method of managing phone calls initiated from a phone device of a PDA 100, in accordance with one embodiment of the present invention. The method starts in step 810 where a call signal to  
10 initiate a call device is received. In a preferred embodiment, the call signal is received by the phone device from a hard button 128, as described above with reference to FIG. 2. The phone device interprets the call signal and then initiates the call device in step 812. Additionally,  
15 the display device 132 displays a selectable interface of the call device 101 in response to the call signal. An example of a default screen of the call device 101 is shown in FIG. 2. In step 816, a dial signal is received from the selectable interface to initiate a phone call. For example,  
20 a user presses a talk button 114 on the screen of the PDA 100, as discussed above with reference to FIG. 3. In response to receiving the dial signal, the phone call is initiated in step 818. For example, the phone device begins procedures to transmit signals into a mobile phone network  
25 to connect the phone call.

FIG. 11 is a more detailed flowchart of the method of FIG. 10, in accordance with one embodiment of the present invention. The method starts in step 810 where a call signal to initiate a call device 101 is received, as discussed above with reference to FIG. 10. The call device 101 is then initiated in step 812, as discussed above with reference to FIG. 10.

In the embodiment of FIG. 11, the PDA 100 determines if the phone device is in another current application, other than the call device 101. If the phone device is in another current application, the PDA 100 suspends this current application in step 826. On the other hand, if the phone device is not in another current application, the PDA 100 does not suspend another current application. In step 814, the PDA 100 displays a selectable interface of the call device 101 in response to the call signal, as discussed above reference to FIG. 10.

In decision operation 830, it is determined if the talk button 114 is pressed or if digits are pressed on the dialer pad 102. If the talk button is pressed before digits are pressed, the last phone number that was called is redialed in step 832. The talk button, for example, is a touch sensitive icon on a display device 132 of the PDA 100. The talk button may operate as a redial key, as discussed above with reference to FIG. 2. A phone call is then initiated in step 818, as discussed above with reference to FIG. 10.



006260" 90492960

If, however, the digits are pressed on the dialer pad 102, the PDA 100 displays numbers in the name field 104. For example, a user may input numbers on the touch-sensitive screen of the display device 101 in much the same way as inputting numbers into a touch-tone phone. The numbers then appear on the display device 132, as discussed above with reference to FIG. 3. In steps 816 and 818, a dial signal is received, and the phone call is initiated, as discussed above with reference to FIG. 10.

FIG. 12 is a flowchart of a method of managing a phone call initiated from a phone device of a PDA 100, in accordance with one embodiment of the present invention. Upon initiating the phone call, it is determined in step 850 if a name exists in memory for the phone number to be dialed. For example, the PDA searches a stored address book for a name associated with the phone number. If no name exists, then phone device proceeds to dial the number.

However, if a name does exist in memory, the phone number that it is displayed on the display device 101 is replaced with the name. For example, if the PDA finds "Timothy Tw...-w" to be associated with the phone number, then "Timothy Tw...-w" appears in the name field 104, as discussed above with reference to FIG. 7.

The phone number is dialed in step 854. When a phone number is dialed, the PDA 100 attempts to connect with a device associated with the dialed phone number. While

dialing, a connecting icon 302 is displayed in step 856. The purpose of the connecting icon 302 is to indicate a phone call is being dialed, as discussed above with reference to FIG. 4.

5 In decision operation 858, it is determined if a connection has been established with the phone call. If there is a connection, a timer starts in step 860. For example, the timer displays the duration of the current connection, as discussed above with reference to FIG. 5. In  
10 step 862, the phone call is conducted, which may involve the PDA 100 allowing a user to carry on a conversation with a person on the other end.

In decision operation 864, it is determined if the dialed number is to be saved. If the PDA 100 does not  
15 receive a save signal to save the dialed phone number, it is determined in decision operation 868 whether there is still a connection. However, if the PDA 100 receives a save signal to save the dialed phone number, the address entry application 502 is initiated in step 866. As an example,  
20 the user may press the save button 303 during the middle of the phone call, as discussed above with reference to FIG. 5. The address entry application 502 is then initiated and a user interface for inputting identification information is displayed.

25 The phone device continuously determines in decision operation 868 whether there is still a connection. For

example, the user may hang up by pressing the end button 120, or the dialed correspondent may end the connection.

If there is no longer a connection, a lapse time routine is conducted in step 870. The lapse time routine preferably involves staying the screen as is for about 10 seconds, as discussed above with reference to FIG. 8. During the lapse time routine, it is determined in operation 872 whether the dialed phone number is to be saved. If the number is to be saved, then the address entry application 502 is initiated in step 866. For example, a user may tap the save button 303 to store the phone number, as discussed above with reference to FIG. 8. In decision operation 874, if it is determined that the lapse time routine is over, then the method is done. For example, once 10 seconds of laps time has expired, the call device 101 returns to the original default screen, as discussed above with reference to FIG. 8.

In short, the foregoing discussion with references to FIG. 10, FIG. 12, and FIG. 12, includes a method of managing a phone call initiated from a phone device of a personal digital assistant.

#### Hardware Overview

FIG. 13 is a block diagram that illustrates a computer system 900 upon which an embodiment of the invention may be

implemented. The preferred embodiment is implemented using one or more computer programs running on a portable computer, such as PDA 100. Accordingly, in this embodiment, the computer system 900 is PDA 100.

5       The configuration shown in FIG. 13 is for exemplary purposes for discussing the present invention. Many different combinations of processing units, programs, memory units, and telephone devices (modules) will be apparent to those skilled in the art to perform similar operations as  
10       required by the present invention.

Computer system 900 includes a bus 902 or other communication mechanism for communicating information, and a processor 904 coupled with bus 902 for processing information. Computer system 900 also includes a main  
15       memory 906, such as a random access memory (RAM) or other dynamic storage device, coupled to bus 902 for storing information and instructions to be executed by processor 904. Main memory 906 also may be used for storing temporary variables or other intermediate information during execution  
20       of instructions to be executed by processor 904. Computer system 900 further includes a read only memory (ROM) 908 or other static storage device coupled to bus 902 for storing static information and instructions for processor 904. A storage device 910, such as a magnetic disk or optical disk,  
25       is provided and coupled to bus 902 for storing information and instructions.

Computer system 900 may be coupled via bus 902 to a display 912, such as a liquid crystal display (LCD), for displaying information to a computer user. An input device 914 is a touch-sensitive LCD that interprets input by  
5 sensing contact on the LCD. The input device 914 is coupled to bus 902 for communicating information and command selections to processor 904. Another type of input device 914 includes alphanumeric and other keys, and is coupled to bus 902 for communicating information and command selections  
10 to processor 904. Still another type of user input device is cursor control 916, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor 904 and for controlling cursor movement on display 912. This input  
15 device typically has two degrees of freedom in two axes, a first axis (e.g., x) and a second axis (e.g., y), that allows the device to specify positions in a plane.

The invention is related to the use of computer system 900 for providing mobile phone applications in a PDA 100.

20 According to one embodiment of the invention, mobile phone applications are provided by computer system 900 in response to processor 904 executing one or more sequences of one or more instructions contained in main memory 906. Such instructions may be read into main memory 906 from another  
25 computer-readable medium, such as storage device 910.

Execution of the sequences of instructions contained in main memory 906 causes processor 904 to perform the process steps described herein. In alternative embodiments, hard-wired

circuitry may be used in place of or in combination with software instructions to implement the invention. Thus, embodiments of the invention are not limited to any specific combination of hardware circuitry and software.

5       The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to processor 904 for execution. Such a medium may take many forms, including but not limited to, non-volatile media, volatile media, and transmission media.

10      Non-volatile media includes, for example, optical or magnetic disks, such as storage device 910. Volatile media includes dynamic memory, such as main memory 906.

Transmission media includes coaxial cables, copper wire and fiber optics, including the wires that comprise bus 902.

15      Transmission media can also take the form of acoustic or light waves, such as those generated during radio-wave and infra-red data communications.

Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic  
20      tape, or any other magnetic medium, a CD-ROM, a DVD, any other optical medium, punchcards, papertape, any other physical medium with patterns of holes, a RAM, a DRAM, a VRAM, a ROM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described  
25      hereinafter, or any other medium from which a computer can read.

Various forms of computer readable media may be involved in carrying one or more sequences of one or more

instructions to processor 904 for execution. For example, the instructions may initially be carried on a magnetic disk of a remote computer. The remote computer can load the instructions into its dynamic memory and send the

5 instructions over a telephone line using a modem. A modem local to computer system 900 can receive the data on the telephone line and use an infra-red transmitter to convert the data to an infra-red signal. An infra-red detector coupled to bus 902 can receive the data carried in the  
10 infra-red signal and place the data on bus 902. Bus 902 carries the data to main memory 906, from which processor 904 retrieves and executes the instructions. The instructions received by main memory 906 may optionally be stored on storage device 910 either before or after  
15 execution by processor 904.

Computer system 900 also includes a communication interface 918 coupled to bus 902. Communication interface 918 provides a two-way data communication coupling to a network link 920 that is connected to a local network 922.  
20 As an example, the communication interface 918 is connected to an antenna and performs wireless communications to a network, such as Internet ISP 926 or local network 922. In another example, the communication interface 918 connects to a mobile phone network to complete calls initiated by the  
25 process of the present invention. In still another example, communication interface 918 is an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone

line. In yet another example, communication interface 918 is a local area network (LAN) card that provides a data communication connection to a compatible LAN. In any such implementation, communication interface 918 sends and  
5 receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

In a preferred embodiment, the communication interface 918 is a phone device that communicates with a network  
10 carrier to make phone calls, including any of satellite, PCS, cellular, radio, landline, plain old telephone system (POTS), mobile, and other communication modes. Incoming call indications (such as incoming call, caller ID, call status, etc.) are sent from the phone device to the call device 101  
15 running on the processing unit via the bus 902. Although a bus is shown, any mode of data communication between the various modules may be provided. The call device 101 initiates calls and directs call operations by sending commands to the phone device (via the system bus, for  
20 example).

Network link 920 typically provides data communication through one or more networks to other data devices. For example, network link 920 may provide a connection through local network 922 to a host computer 924 or to data  
25 equipment operated by an Internet Service Provider (ISP) 926. ISP 926 in turn provides data communication services through the world wide packet data communication network now commonly referred to as the "Internet" 928. Local network



005260 90452960  
922 and Internet 928 both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals on network link 920 and through communication interface 918, which carry the digital data to and from computer system 900, are exemplary forms of carrier waves transporting the information.

Computer system 900 can send messages and receive data, including program code, through the network(s), network link 920 and communication interface 918. In the Internet example, a server 930 might transmit a requested code for an application program through Internet 928, ISP 926, local network 922 and communication interface 918.

The received code may be executed by processor 904 as it is received, and/or stored in storage device 910, or other non-volatile storage for later execution. In this manner, computer system 900 may obtain application code in the form of a carrier wave.

## 20 Scope

In this disclosure, including in the claims, certain process steps are set forth in a particular order, and alphabetic and alphanumeric labels may be used to identify certain steps. Unless specifically stated in the disclosure, embodiments of the invention are not limited to any particular order of carrying out such steps. In particular, the labels are used merely for convenient identification of



## CLAIMS

*What Is Claimed Is:*

1. A method of managing phone calls initiated from a phone  
5 device of a personal digital assistant, the method  
comprising:

receiving a call signal to initiate a call device;

initiating the call device in response to the call  
signal;

- 10 displaying a selectable interface of the call device in  
response to the call signal;

receiving a dial signal from the selectable interface  
to initiate a phone call; and

- 15 initiating the phone call in response to the dial  
signal.

2. The method of Claim 1, wherein the call signal is  
received from a hard button of the personal digital  
assistant.

20

3. The method of Claim 1, wherein the selectable interface  
is configured to include a talk button icon.

4. The method of Claim 1, further comprising suspending a current application, wherein the current application is other than the call device.
- 5 5. The method of Claim 1, wherein the phone call is associated with a redialed phone number of a most recent phone call.
6. The method of Claim 1, further comprising:
- 10 receiving a phone number for the phone call; and  
searching a memory of the personal digital assistant  
for a name associated with the phone number.
7. The method of Claim 1, further comprising:
- 15 establishing a connection with another phone device;  
and  
initiating a timer configured to clock a duration of  
the connection with the other phone device.
- 20 8. The method of Claim 1, further comprising:  
receiving a phone number for the phone call;  
receiving a save signal to save the phone number; and

initiating an address entry application in response to  
receiving the save signal.

9. The method of Claim 7, further comprising:

5 receiving an ended connection signal; and  
initiating a lapse time routine in response to  
receiving the ended connection signal.

10. A portable computer system for managing a phone call,  
10 the system comprising:

a personal digital assistant including:

a display device;

a phone device;

a call device configured to control the phone  
15 device and to display a selectable interface  
on the display device;

a hard button configured to initiate the call  
device; and

a selection mechanism configured to receive user  
20 selections from the selectable interface.

11. The portable computer system of Claim 10, wherein the  
personal digital assistant is further configured to

control phone calls placed and received by the phone device according to the user selections.

12. The portable computer system of Claim 10, wherein the  
5 display device is a touch-sensitive screen, and wherein the selection mechanism includes a tap recognizer configured to identify a tap input from a user.

13. The portable computer system of Claim 10, wherein the  
10 hard button is further configured to suspend a current application.

14. The portable computer system of Claim 12, wherein the  
15 tap recognizer is further configured to initiate a phone call in response to identifying the tap input.

15. The portable computer system of Claim 12, wherein the  
20 tap recognizer is further configured to initiate an address entry application in response to identifying the tap input.

16. The portable computer system of Claim 12, further comprising a microphone connected to the personal digital assistant, the microphone being configured to

receive audio input from a user of the portable computer system, wherein the tap recognizer is further configured to deactivate the microphone in response to identifying the tap input.

5

17. A computer-readable medium carrying one or more sequences of one or more instructions for managing a phone call initiated from a phone device of a personal digital assistant, the one or more sequences of one or more instructions including instructions which, when executed by one or more processors, cause the one or more processors to perform the steps of:

10

receiving a call signal to initiate a call device;  
initiating the call device in response to the call

15

signal;  
displaying a selectable interface of the call device in response to the call signal;

receiving a dial signal from the selectable interface to initiate a phone call; and

20

initiating the phone call in response to the dial signal.

18. The computer-readable medium as recited in Claim 17, wherein the call signal is received from a hard button of the personal digital assistant.

25

006260" 90492960

19. The computer-readable medium as recited in Claim 17,  
wherein the selectable interface is configured to  
include a talk button icon.

5

20. The computer-readable medium as recited in Claim 17,  
wherein the instructions further cause the processor to  
carry out the step of suspending a current application,  
wherein the current application is other than the call  
device.

10

21. The computer-readable medium as recited in Claim 17,  
wherein the phone call is associated with a redialed  
phone number of a most recent phone call.

15

22. The computer-readable medium as recited in Claim 17,  
wherein the instructions further cause the processor to  
carry out the steps of:

receiving a phone number for the phone call; and

20

searching a memory of the personal digital assistant  
for a name associated with the phone number.



23. The computer-readable medium as recited in Claim 17,  
wherein the instructions further cause the processor to  
carry out the steps of:

establishing a connection with another phone device;

5                   and

initiating a timer configured to clock a duration of  
the connection with the other phone device.

24. The computer-readable medium as recited in Claim 17,  
wherein the instructions further cause the processor to  
carry out the steps of:

receiving a phone number for the phone call;

receiving a save signal to save the phone number; and

initiating an address entry application in response to

15                   receiving the save signal.

25. The computer-readable medium as recited in Claim 23,  
wherein the instructions further cause the processor to  
carry out the steps of:

20                   receiving an ended connection signal; and

initiating a lapse time routine in response to  
receiving the ended connection signal.

[illegible]

## ABSTRACT

5           A system and method is described for managing phone  
calls initiated from a phone device of a personal digital  
assistant. In one example, a system for managing a phone  
call is described. The system comprises, among other  
things, a personal digital assistant. The personal digital  
10 assistant includes the following: a display device; a phone  
device; a call device configured to control the phone device  
and to display a selectable interface on the display device;  
a hard button configured to initiate the call device; and a  
selection mechanism configured to receive user selections  
15 from the selectable interface.

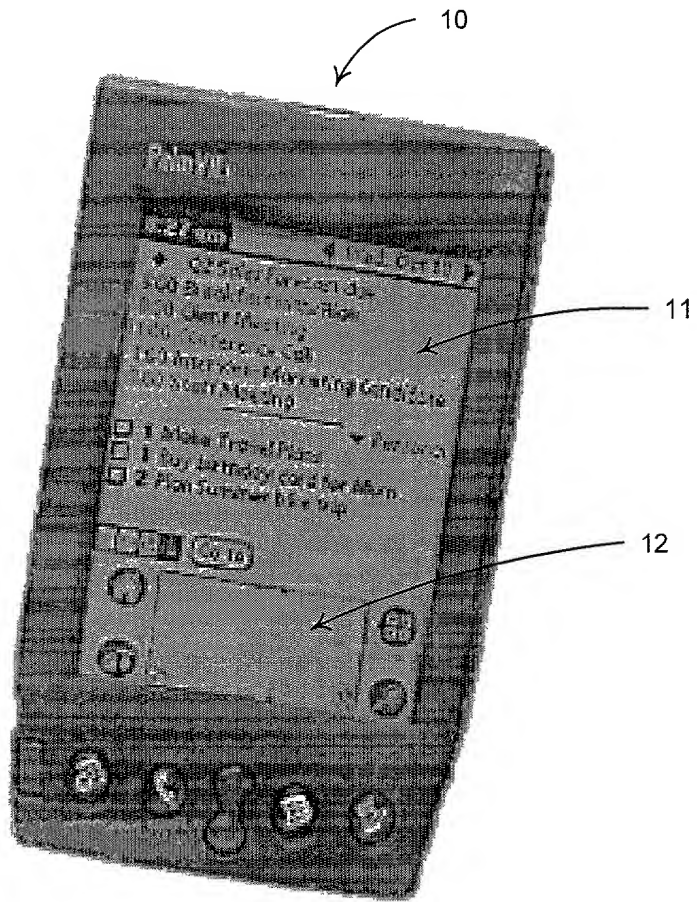


FIG. 1

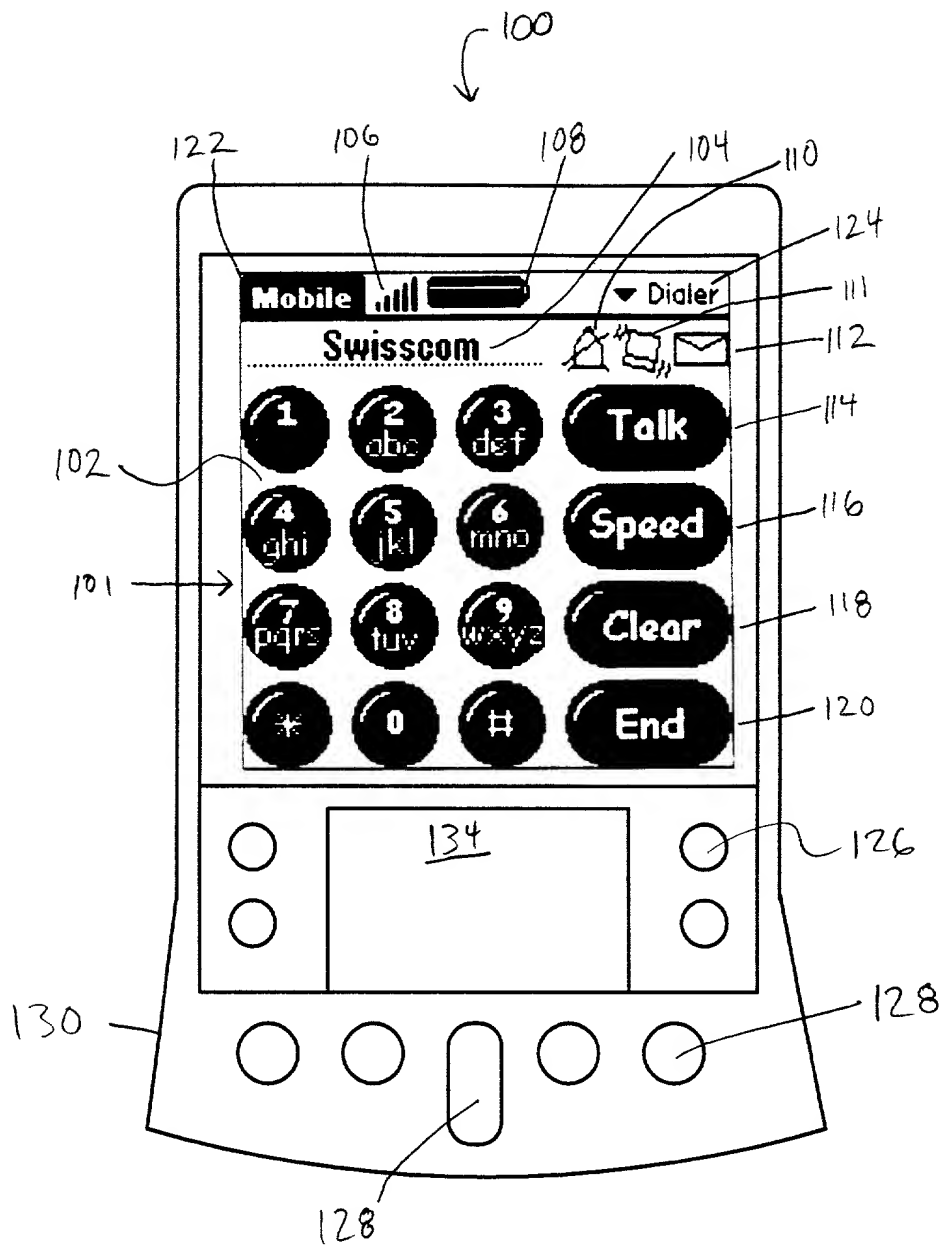


FIG. 2

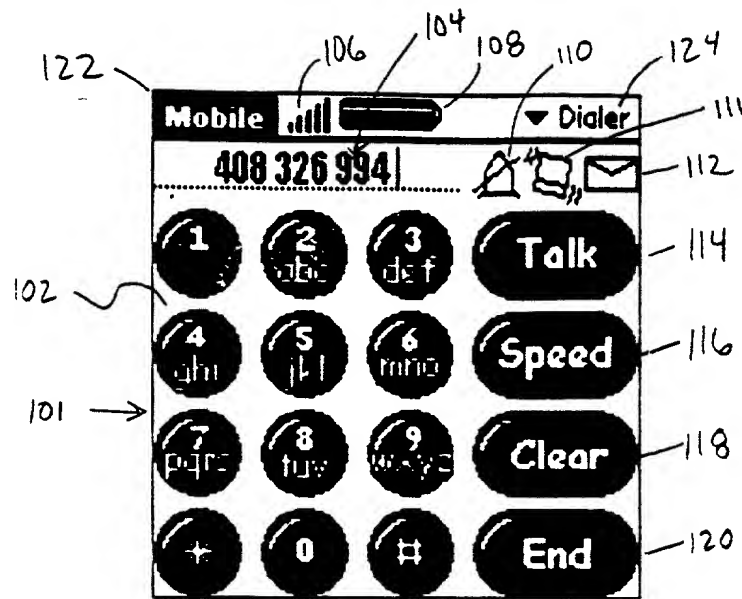


FIG. 3

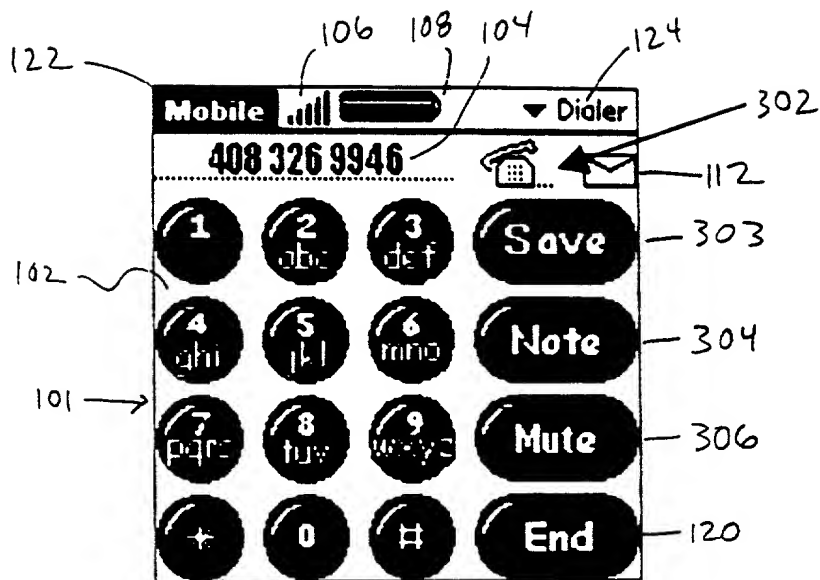


FIG. 4

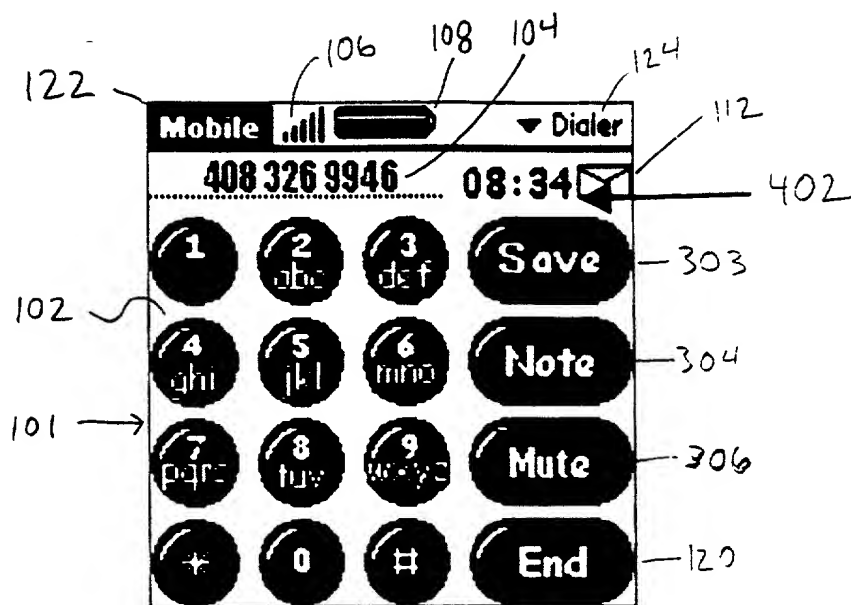


FIG. 5

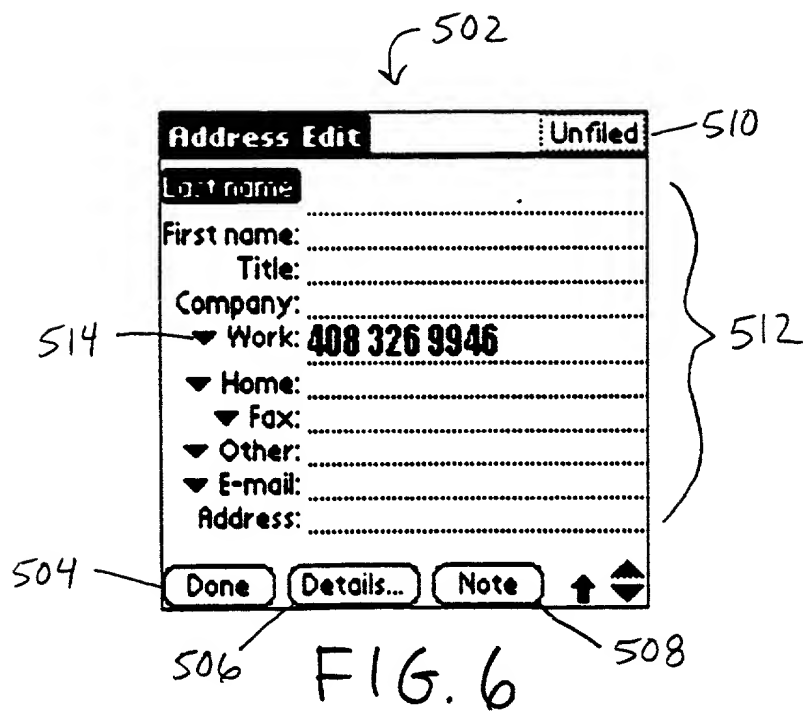


FIG. 6

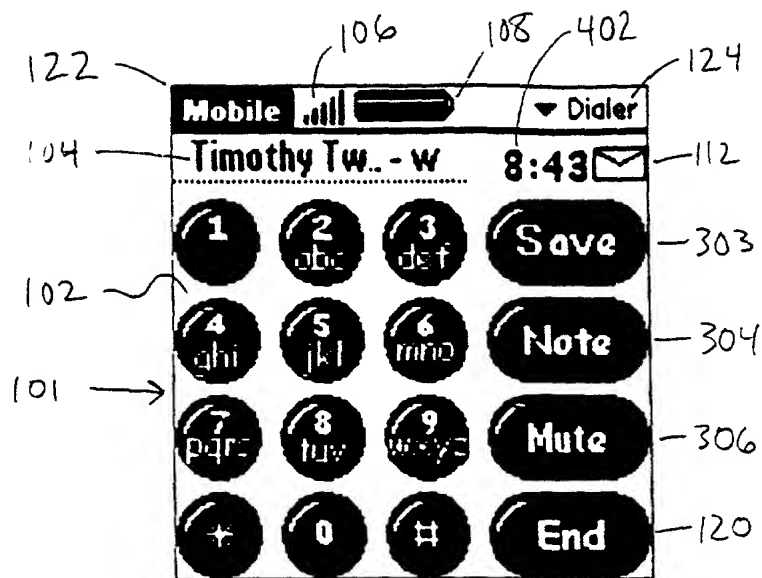


FIG. 7

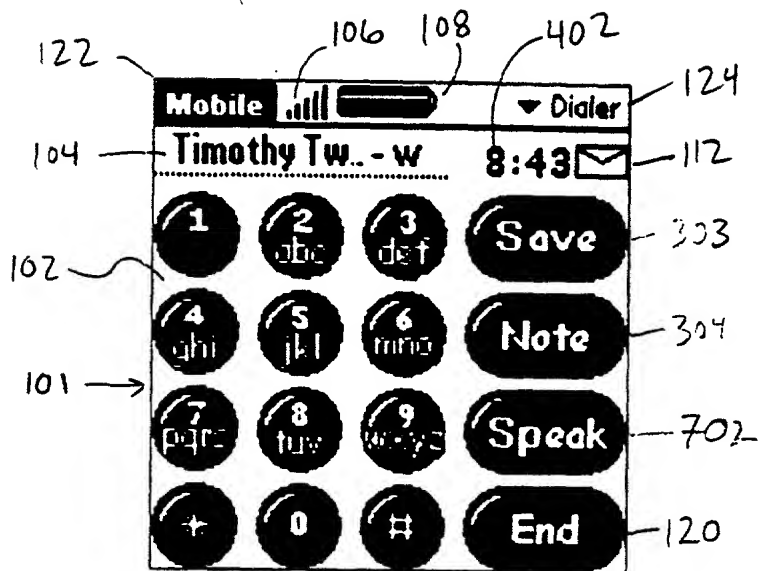


FIG. 8

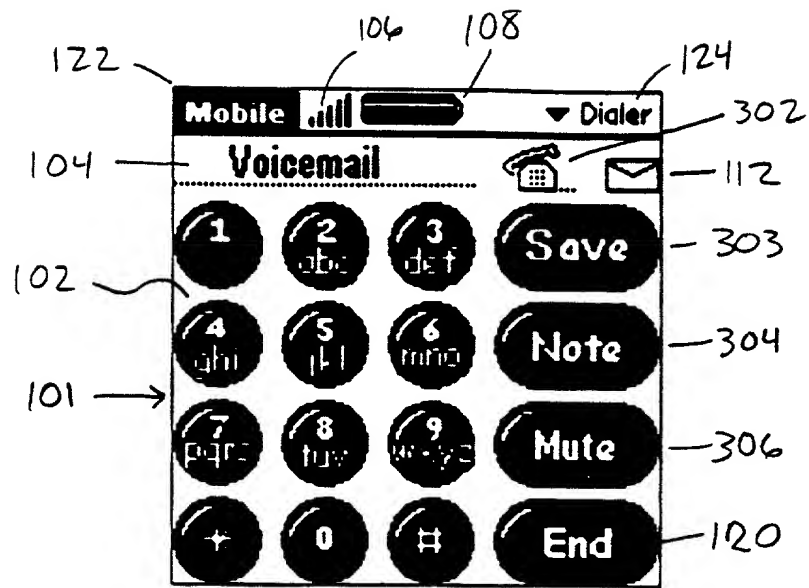


FIG. 9



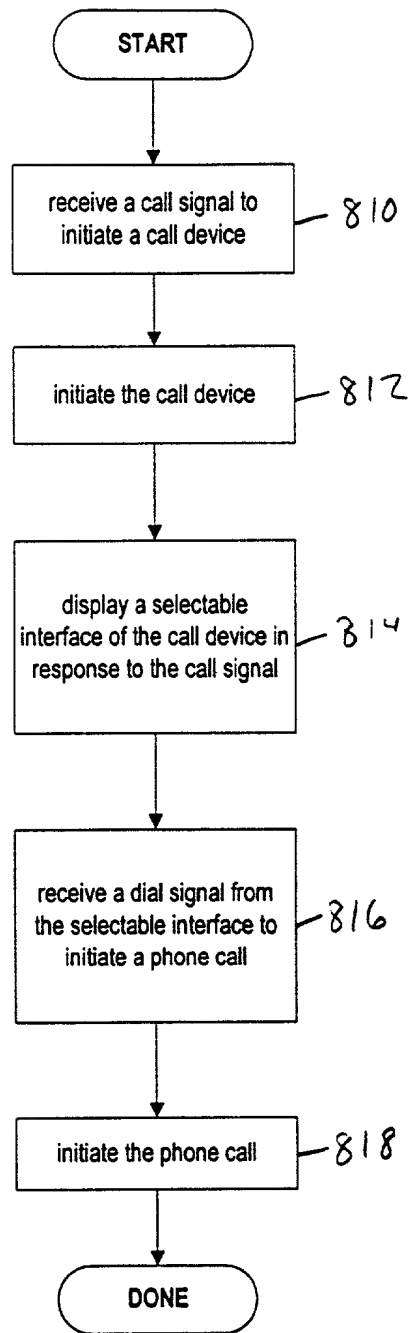


FIG. 10

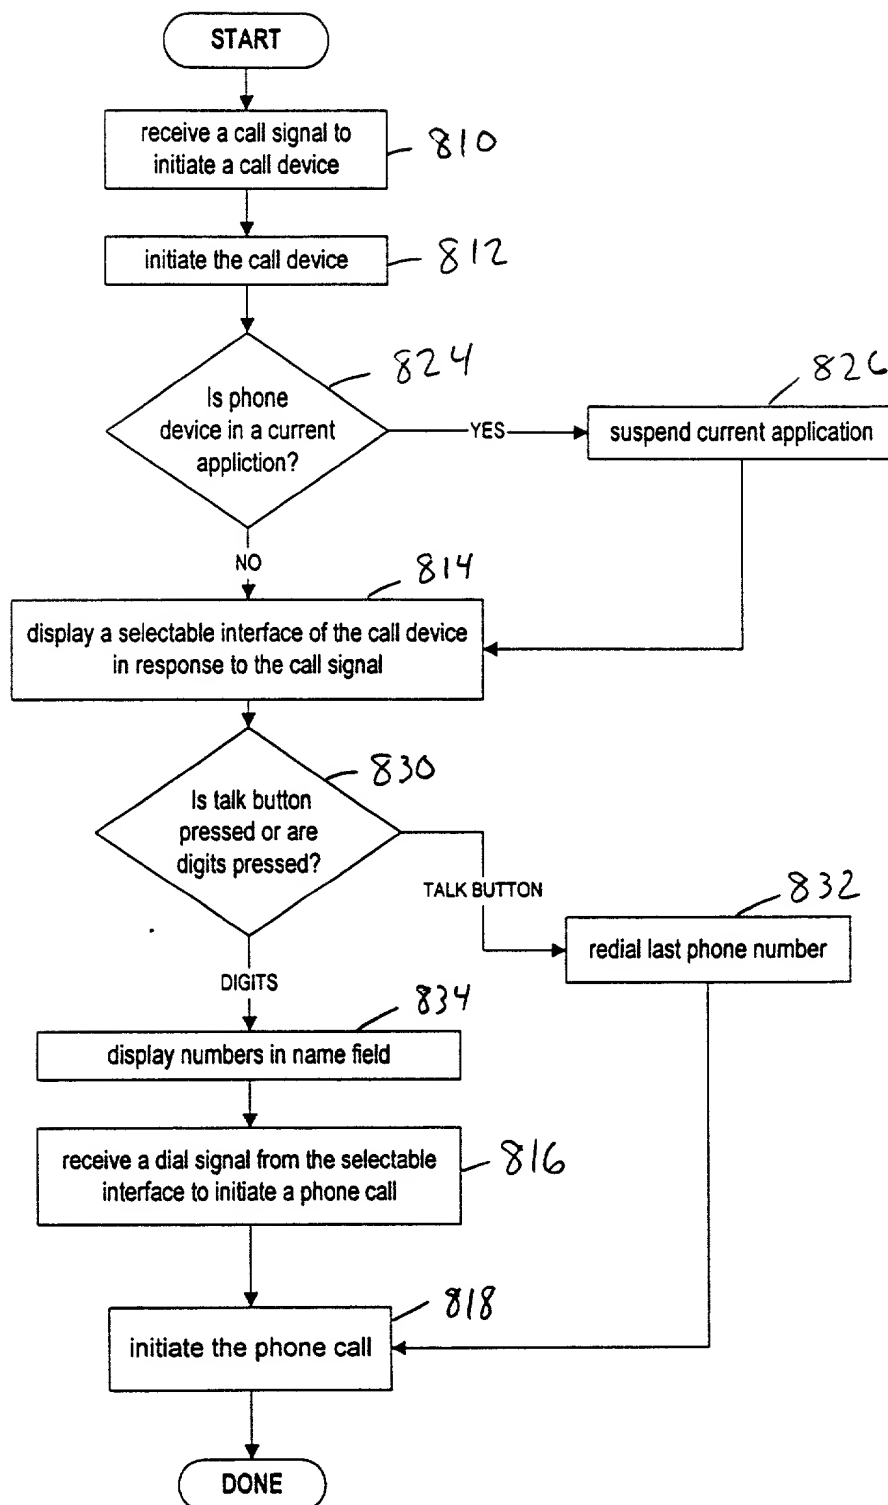


FIG. 11


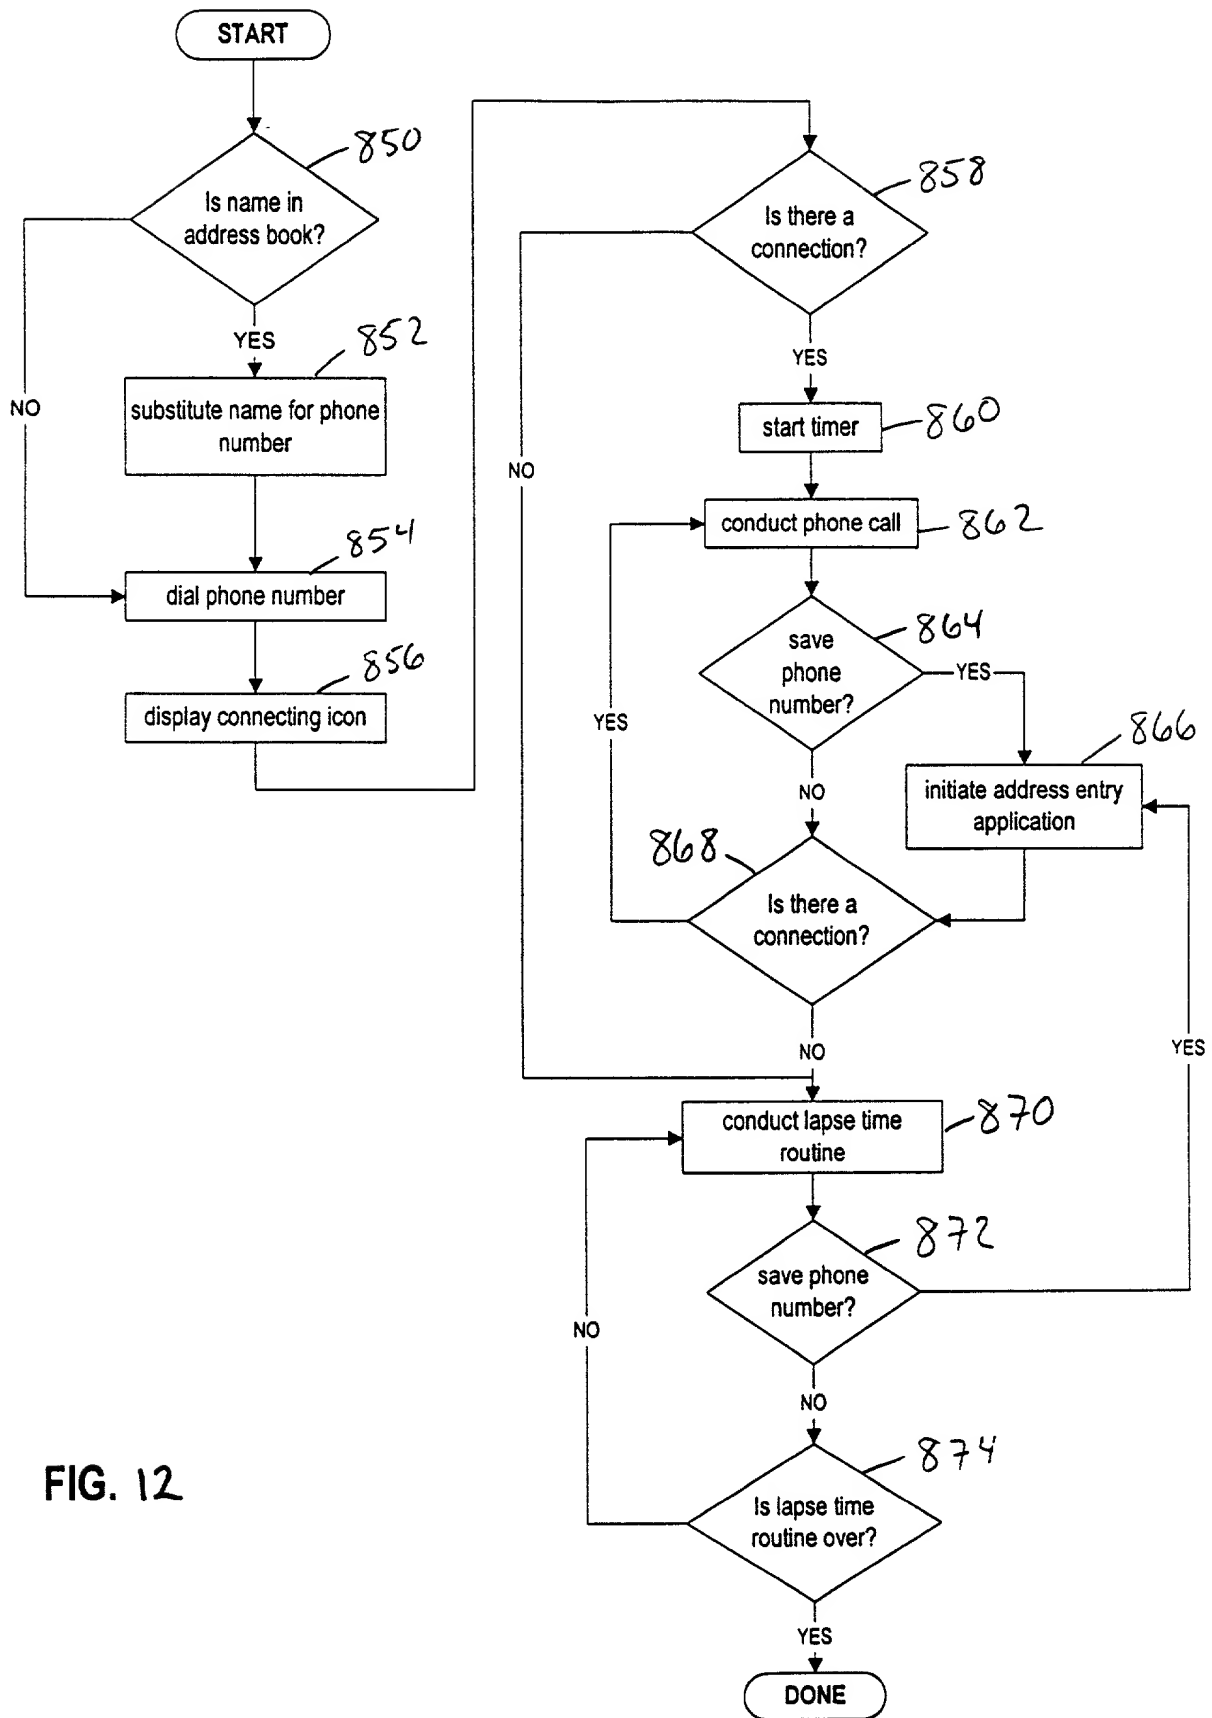


FIG. 12

FIG. 13

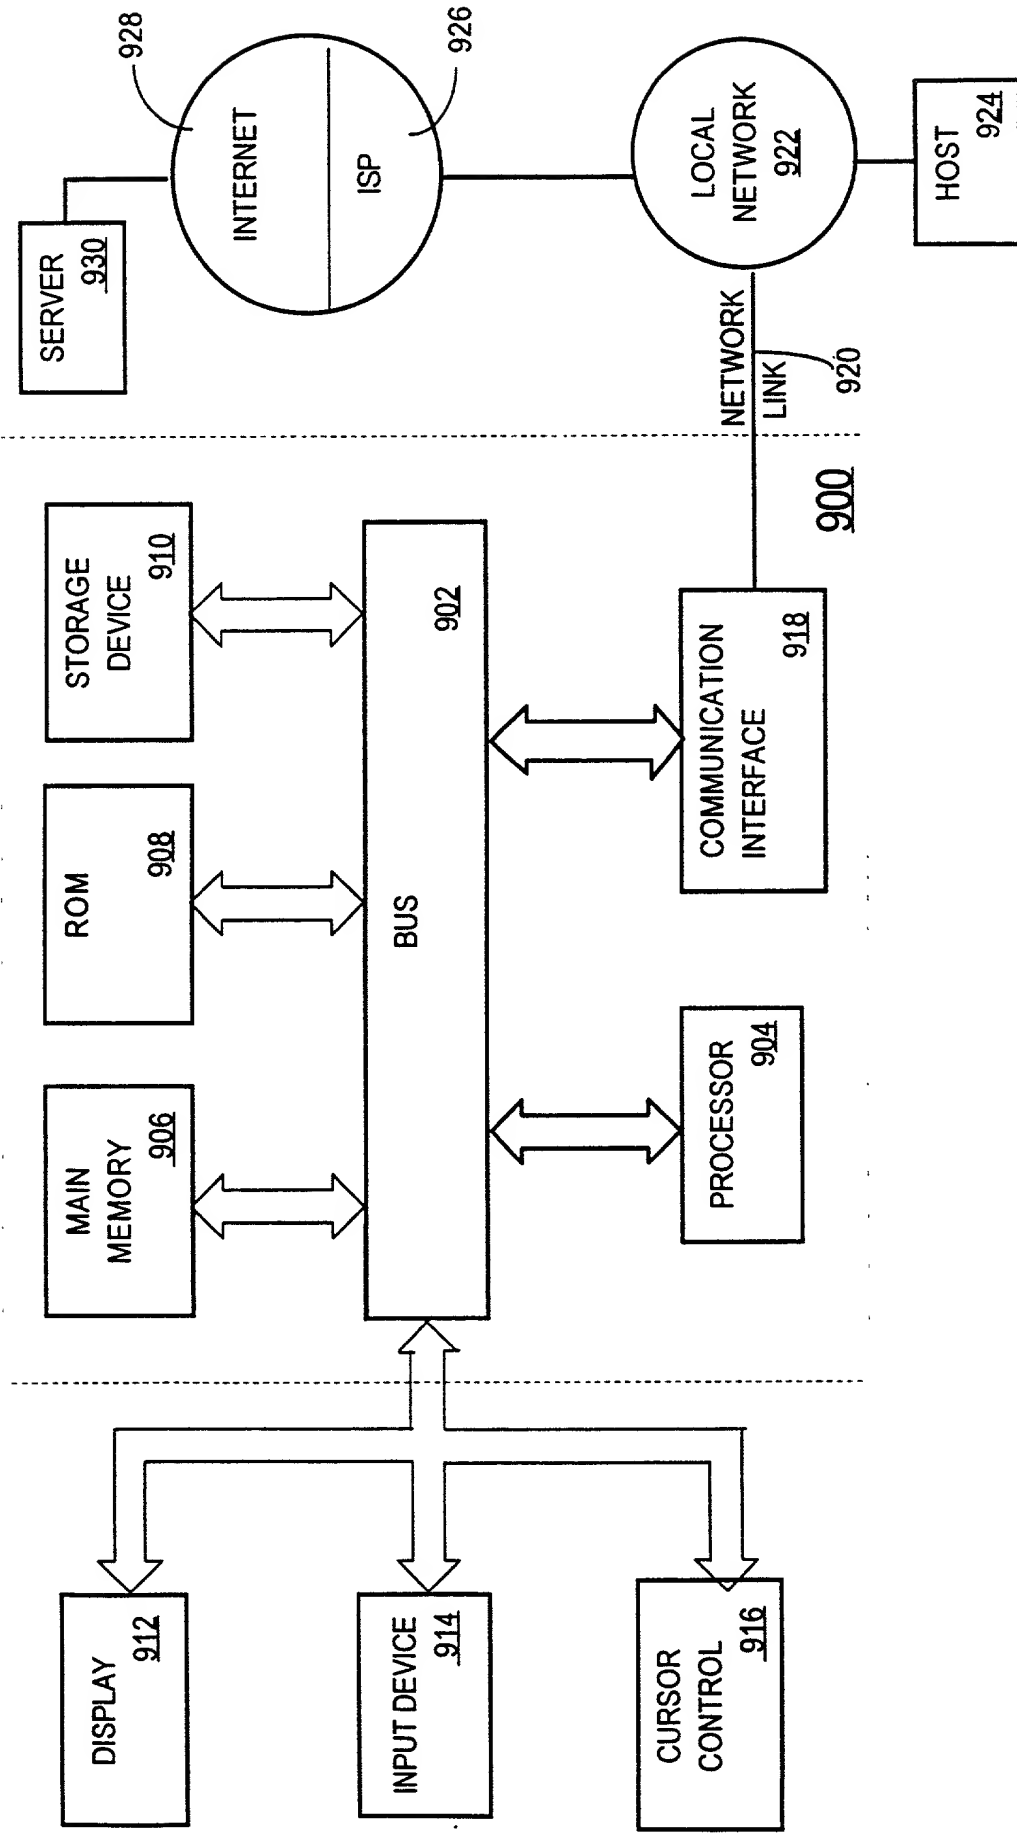

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**SYSTEM AND METHOD FOR INITIATING A CALL USING A PHONE HARD-BUTTON AND A SCREEN DIALER OF A PERSONAL DIGITAL ASSISTANT**

for which application for Letters Patent of the United States of America is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed	
	<u>Yes</u>	<u>No</u>

Number	Country	Day/Month/Year Filed
--------	---------	----------------------

Number	Country	Day/Month/Year Filed
--------	---------	----------------------

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) below.

Application Number	Filing Date
--------------------	-------------

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Number	Filing Date	Status: Patented, Pending, Abandoned
--------------------	-------------	--------------------------------------

Application Number	Filing Date	Status: Patented, Pending, Abandoned
--------------------	-------------	--------------------------------------

006660" 90452960

I HEREBY APPOINT THE FOLLOWING AS MY ATTORNEYS WITH FULL POWER OF SUBSTITUTION  
TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT OFFICE  
CONNECTED THEREWITH:

<u>Attorney</u>	<u>Reg. No.</u>
J. William Wigert	24,582
Nathan P. Koenig	38,210
Doyle B. Johnson	39,240
Malcolm B. Wittenberg	27,028
Tobi Clinton	43,553
John W. Carpenter	39,129

Send correspondence to:

John W. Carpenter  
CROSBY, HEAFEY, ROACH & MAY  
P.O. Box 7936  
San Francisco, CA 94120-7936  
DID Ph.: 415-659-5927  
Ph.: 415-543-8700  
Fax: 415-391-8269

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Stephane Maes

Inventor's signature \_\_\_\_\_

Date: \_\_\_\_\_, 2000

Residence:

Citizenship:

Post Office Address:

Full name of second or joint inventor: Scott Lincke

Inventor's signature \_\_\_\_\_

Date: \_\_\_\_\_, 2000

Residence:

Citizenship:

Post Office Address:

006660" 94452960

Full name of third or joint inventor: Sean Mercer

Inventor's signature \_\_\_\_\_

Date: \_\_\_\_\_, 2000

Residence:

Citizenship:

Post Office Address:

Full name of fourth or joint inventor: Ryan Robertson

Inventor's signature \_\_\_\_\_

Date: \_\_\_\_\_, 2000

Residence:

Citizenship:

Post Office Address:

00660" 6145450